


# OMEGA COMPRESSORS

Heavy Duty Industrial Air Compressors

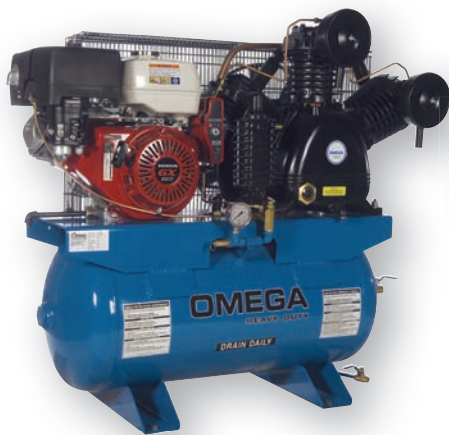

For us, it's not just business. It's personal.

# Heavy Duty Industrial Air Compressors

## HEAVY DUTY SERIES - VERTICAL TANK MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.  
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
  - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
  - Auto drain - electronic or pneumatic.
  - Belt guard aftercooler.
  - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5080V



TK-150120V

## Specifications

| MODEL      | HP  | MOTOR RPM | CFM (FAD)**<br>150 PSI | MAX PSI | TANK SIZE | PUMP   |          |       |      | AIR OUTLET | WEIGHT LBS. | DIMENSIONS (INCHES) |       |        |
|------------|-----|-----------|------------------------|---------|-----------|--------|----------|-------|------|------------|-------------|---------------------|-------|--------|
|            |     |           |                        |         |           | MODEL  | CYLINDER | STAGE | RPM  |            |             | LENGTH              | WIDTH | HEIGHT |
| TE-5060V   | 5   | 3450      | 15.4                   | 175     | 60        | TE-50  | V-3      | 2     | 1300 | 3/4"       | 375         | 31                  | 22    | 67     |
| TE-5080V   | 5   | 3450      | 15.4                   | 175     | 80        | TE-50  | V-3      | 2     | 1300 | 3/4"       | 466         | 34                  | 25    | 65     |
| TK-5060V   | 5   | 1725      | 19.0                   | 175     | 60        | TK-50  | V-3      | 2     | 960  | 3/4"       | 490         | 34                  | 22    | 72     |
| TK-5080V   | 5   | 1725      | 19.0                   | 175     | 80        | TK-50  | V-3      | 2     | 960  | 3/4"       | 586         | 34                  | 25    | 70     |
| TK-50120V  | 5   | 1725      | 19.0                   | 175     | 120       | TK-50  | V-3      | 2     | 960  | 3/4"       | 749         | 42                  | 30    | 76     |
| TK-7580V   | 7.5 | 1725      | 27.5                   | 175     | 80        | TK-100 | V-3      | 2     | 630  | 3/4"       | 760         | 39                  | 25    | 73     |
| TK-75120V  | 7.5 | 1725      | 27.5                   | 175     | 120       | TK-100 | V-3      | 2     | 630  | 3/4"       | 834         | 42                  | 30    | 79     |
| TK-10080V  | 10  | 1725      | 35.3                   | 175     | 80        | TK-100 | V-3      | 2     | 845  | 3/4"       | 829         | 39                  | 25    | 73     |
| TK-100120V | 10  | 1725      | 35.3                   | 175     | 120       | TK-100 | V-3      | 2     | 845  | 3/4"       | 992         | 42                  | 30    | 79     |
| TK-150120V | 15  | 1725      | 52.0                   | 175     | 120       | TK-150 | V-3      | 2     | 730  | 3/4"       | 1301        | 50                  | 34    | 83     |
| TK-200120V | 20  | 1725      | 68.8                   | 175     | 120       | TK-150 | V-3      | 2     | 920  | 3/4"       | 1572        | 50                  | 34    | 83     |

**OMEGA**  
COMPRESSORS

Specifications and data subject to change.  
\*\*Notes: CFM (FAD) = CFM Free Air Delivery

# Heavy Duty Industrial Air Compressors

## HEAVY DUTY SERIES - HORIZONTAL TANK MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.  
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
  - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
  - Auto drain - electronic or pneumatic.
  - Belt guard aftercooler.
  - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



## Specifications

| MODEL      | HP  | MOTOR RPM | CFM (FAD)**<br>150 PSI | MAX PSI | TANK SIZE | PUMP    |          |       |      | AIR OUTLET | WEIGHT LBS. | DIMENSIONS (INCHES) |       |        |
|------------|-----|-----------|------------------------|---------|-----------|---------|----------|-------|------|------------|-------------|---------------------|-------|--------|
|            |     |           |                        |         |           | MODEL   | CYLINDER | STAGE | RPM  |            |             | LENGTH              | WIDTH | HEIGHT |
| TE-5060    | 5   | 3450      | 15.4                   | 175     | 60        | TE-50   | V-3      | 2     | 1300 | 3/4"       | 379         | 60                  | 22    | 41     |
| TE-5080    | 5   | 3450      | 15.4                   | 175     | 80        | TE-50   | V-3      | 2     | 1300 | 3/4"       | 470         | 69                  | 22    | 41     |
| TK-5060    | 5   | 1725      | 19.0                   | 175     | 60        | TK-50   | V-3      | 2     | 960  | 3/4"       | 494         | 60                  | 22    | 45     |
| TK-5080    | 5   | 1725      | 19.0                   | 175     | 80        | TK-50   | V-3      | 2     | 960  | 3/4"       | 547         | 69                  | 22    | 45     |
| TK-50120   | 5   | 1725      | 19.0                   | 175     | 120       | TK-50   | V-3      | 2     | 960  | 3/4"       | 660         | 75                  | 27    | 49     |
| TK-7580    | 7.5 | 1725      | 27.5                   | 175     | 80        | TK-100  | V-3      | 2     | 630  | 3/4"       | 721         | 69                  | 22    | 51     |
| TK-75120   | 7.5 | 1725      | 27.5                   | 175     | 120       | TK-100  | V-3      | 2     | 630  | 3/4"       | 923         | 75                  | 27    | 53     |
| TK-10080   | 10  | 1725      | 35.3                   | 175     | 80        | TK-100  | V-3      | 2     | 845  | 3/4"       | 790         | 69                  | 22    | 51     |
| TK-100120  | 10  | 1725      | 35.3                   | 175     | 120       | TK-100  | V-3      | 2     | 845  | 3/4"       | 903         | 75                  | 27    | 53     |
| TK-100240  | 10  | 1725      | 35.3                   | 175     | 240       | TK-100  | V-3      | 2     | 845  | 1"         | 1218        | 93                  | 33    | 59     |
| TK-150120  | 15  | 1725      | 52.0                   | 175     | 120       | TK-150  | V-3      | 2     | 730  | 3/4"       | 1212        | 75                  | 27    | 57     |
| TK-150240  | 15  | 1725      | 52.0                   | 175     | 240       | TK-150  | V-3      | 2     | 730  | 1"         | 1527        | 93                  | 33    | 63     |
| TK-200120  | 20  | 1725      | 68.8                   | 175     | 120       | TK-150  | V-3      | 2     | 920  | 3/4"       | 1257        | 75                  | 27    | 57     |
| TK-200240  | 20  | 1725      | 68.8                   | 175     | 240       | TK-150  | V-3      | 2     | 920  | 1"         | 1572        | 93                  | 33    | 63     |
| TK-250240* | 25  | 1770      | 100.0                  | 175     | 240       | TUK-300 | V-4      | 2     | 720  | 1"         | 1882        | 93                  | 33    | 63     |
| TK-300240* | 30  | 1770      | 115.0                  | 175     | 240       | TUK-300 | V-4      | 2     | 850  | 1"         | 1934        | 93                  | 33    | 63     |

Specifications and data subject to change.

\*Notes: TK-250240 and TK-300240 already equipped with start-stop/continuous run option as standard.

\*\*Notes: CFM (FAD) = CFM Free Air Delivery

**OMEGA**  
COMPRESSORS

# Heavy Duty Industrial Air Compressors

## HEAVY DUTY SERIES - BASE MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units equipped with liquid filled gauge, snubber and flex hose.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.  
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
  - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
  - Belt guard aftercooler.
  - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5000



AR-V240R\*\*\*

## Specifications

| MODEL      | HP  | MOTOR RPM | CFM (FAD)**<br>150 PSI | MAX<br>PSI | PUMP    |          |       |      | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        | RECOMMENDED***<br>Air Receiver |
|------------|-----|-----------|------------------------|------------|---------|----------|-------|------|---------------|----------------|---------------------|-------|--------|--------------------------------|
|            |     |           |                        |            | MODEL   | CYLINDER | STAGE | RPM  |               |                | LENGTH              | WIDTH | HEIGHT |                                |
| TE-5000    | 5   | 3450      | 15.4                   | 175        | TE-50   | V-3      | 2     | 1300 | 1/2"          | 227            | 33                  | 20    | 22     | AR-V60R-PF                     |
| TK-5000    | 5   | 1725      | 19.0                   | 175        | TK-50   | V-3      | 2     | 960  | 3/4"          | 342            | 35                  | 20    | 26.5   | AR-V80R-PF                     |
| TK-7500    | 7.5 | 1725      | 27.5                   | 175        | TK-100  | V-3      | 2     | 630  | 1"            | 516            | 49                  | 26    | 30     | AR-V80R-PF                     |
| TK-100000  | 10  | 1725      | 35.3                   | 175        | TK-100  | V-3      | 2     | 845  | 1"            | 585            | 49                  | 26    | 30     | AR-V120R-PF                    |
| TK-150000  | 15  | 1725      | 52.0                   | 175        | TK-150  | V-3      | 2     | 730  | 1-1/2"        | 919            | 54                  | 30    | 34     | AR-V120R-PF                    |
| TK-200000  | 20  | 1725      | 68.8                   | 175        | TK-150  | V-3      | 2     | 920  | 1-1/2"        | 964            | 54                  | 30    | 34     | AR-V120R-PF                    |
| TK-250000* | 25  | 1770      | 100.0                  | 175        | TUK-300 | V-4      | 2     | 720  | 2"            | 1274           | 64                  | 36    | 38     | AR-V240R-PF                    |
| TK-300000* | 30  | 1770      | 115.0                  | 175        | TUK-300 | V-4      | 2     | 850  | 2"            | 1326           | 64                  | 36    | 38     | AR-V240R-PF                    |

Specifications and data subject to change.

\*Notes: TK-250000 and TK-300000 already equipped with start-stop/continuous run option as standard.

\*\*Notes: CFM (FAD) = CFM Free Air Delivery.

\*\*\*Not included. Must be purchased separately.

**OMEGA**  
COMPRESSORS



# Heavy Duty Industrial Air Compressors

## HEAVY DUTY SERIES - DUPLEX

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200psi and CRN approved for Canada.
- All units set up for lead lag operation unless otherwise specified.
- All units may be ordered with alternator control panel (Alternator control panel supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.  
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
  - Low oil shutdown for each pump.
  - Auto drain - electronic or pneumatic.
  - Belt guard aftercoolers.
- Specialty units and voltages available upon request.



TK-DX-50120

## Specifications

| MODEL        | HP      | MOTOR RPM | CFM (FAD)**<br>150 PSI | MAX<br>PSI | TANK<br>SIZE | PUMP   |          |       |     | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        |
|--------------|---------|-----------|------------------------|------------|--------------|--------|----------|-------|-----|---------------|----------------|---------------------|-------|--------|
|              |         |           |                        |            |              | MODEL  | CYLINDER | STAGE | RPM |               |                | LENGTH              | WIDTH | HEIGHT |
| TK-DX-5080   | 5 X 2   | 1725      | 19.0 X 2               | 175        | 80           | TK-50  | V-3      | 2     | 960 | 3/4"          | 864            | 75                  | 22    | 46     |
| TK-DX-50120  | 5 X 2   | 1725      | 19.0 X 2               | 175        | 120          | TK-50  | V-3      | 2     | 960 | 3/4"          | 977            | 82                  | 26.5  | 50     |
| TK-DX-75120  | 7.5 X 2 | 1725      | 27.5 X 2               | 175        | 120          | TK-100 | V-3      | 2     | 630 | 3/4"          | 1325           | 82                  | 26.5  | 53.5   |
| TK-DX-75240  | 7.5 X 2 | 1725      | 27.5 X 2               | 175        | 240          | TK-100 | V-3      | 2     | 630 | 1"            | 1640           | 102                 | 30    | 60     |
| TK-DX-100120 | 10 X 2  | 1725      | 35.3 X 2               | 175        | 120          | TK-100 | V-3      | 2     | 845 | 3/4"          | 1463           | 82                  | 26.5  | 53.5   |
| TK-DX-100240 | 10 X 2  | 1725      | 35.3 X 2               | 175        | 240          | TK-100 | V-3      | 2     | 845 | 1"            | 1778           | 102                 | 30    | 60     |
| TK-DX-150240 | 15 X 2  | 1725      | 52.0 X 2               | 175        | 240          | TK-150 | V-3      | 2     | 730 | 1"            | 2396           | 102                 | 30    | 64     |
| TK-DX-200240 | 20 X 2  | 1725      | 68.8 X 2               | 175        | 240          | TK-150 | V-3      | 2     | 920 | 1"            | 2486           | 102                 | 30    | 64     |

Specifications and data subject to change.

\*\*Notes: CFM (FAD) = CFM Free Air Delivery.

**OMEGA**  
COMPRESSORS

# Heavy Duty Industrial Air Compressors

## HEAVY DUTY - GAS SERIES

- Heavy duty single and two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All pumps equipped with head unloaders.
- All units are equipped with Honda gas engines with low oil alert.
- 11HP, 13HP and 20HP Honda Engines equipped with electric start as standard.
- TUK-2030GEC and TUK-2000GEC units equipped with a centrifugal clutch as standard.
- All single stage units are factory set at 90-125psi. All two stage units are factory set at 140-175psi.
- All tank mounted units are on air receivers rated at 200 psi and CRN approved for Canada.
- All units supplied with necessary compressor oil for start up.
- All tank mounted units supplied with extended drain valve for air receiver for ease of draining condensation.
- All base mounted units equipped with liquid filled gauge, snubber and flex hose.
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
  - Centrifugal clutch option available for 11HP and 13HP.



TUK-1130GE



TUK-1330GE

## Specifications - Tank Mounted Units

| MODEL     | HP  | CFM (FAD)**<br>125 PSI | MAX<br>PSI | TANK<br>SIZE | PUMP   |          |       |      | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        |
|-----------|-----|------------------------|------------|--------------|--------|----------|-------|------|---------------|----------------|---------------------|-------|--------|
|           |     |                        |            |              | MODEL  | CYLINDER | STAGE | RPM  |               |                | LENGTH              | WIDTH | HEIGHT |
| PUK-5530G | 5.5 | 10.5                   | 125        | 30           | PUK-60 | V-2      | 1     | 1100 | 1/2"          | 270            | 46                  | 20    | 35     |
| PUK-9030G | 9   | 17.6                   | 125        | 30           | PUK-65 | V-3      | 1     | 1100 | 1/2"          | 305            | 46                  | 20    | 39     |

| MODEL        | HP | CFM (FAD)**<br>175 PSI | MAX<br>PSI | TANK<br>SIZE | PUMP    |          |       |     | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        |
|--------------|----|------------------------|------------|--------------|---------|----------|-------|-----|---------------|----------------|---------------------|-------|--------|
|              |    |                        |            |              | MODEL   | CYLINDER | STAGE | RPM |               |                | LENGTH              | WIDTH | HEIGHT |
| TUK-1130GE   | 11 | 19.0                   | 175        | 30           | TUK-50  | V-3      | 2     | 960 | 1/2"          | 440            | 46                  | 20    | 39     |
| TUK-1330GE   | 13 | 27.5                   | 175        | 30           | TUK-100 | V-3      | 2     | 630 | 1/2"          | 570            | 46                  | 20    | 44.5   |
| TUK-2030GEC* | 20 | 35.3                   | 175        | 30           | TUK-100 | V-3      | 2     | 845 | 1/2"          | 600            | 48                  | 24    | 44.5   |

## Specifications - Base Mounted Units

| MODEL     | HP  | CFM (FAD)**<br>125 PSI | MAX<br>PSI | TANK<br>SIZE | PUMP   |          |       |      | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        |
|-----------|-----|------------------------|------------|--------------|--------|----------|-------|------|---------------|----------------|---------------------|-------|--------|
|           |     |                        |            |              | MODEL  | CYLINDER | STAGE | RPM  |               |                | LENGTH              | WIDTH | HEIGHT |
| PUK-5500G | 5.5 | 10.5                   | 125        | N/A          | PUK-60 | V-2      | 1     | 1100 | 1/2"          | 170            | 30                  | 17.25 | 30     |
| PUK-9000G | 9   | 17.6                   | 125        | N/A          | PUK65  | V-3      | 1     | 1100 | 1/2"          | 205            | 35                  | 19    | 26.5   |

| MODEL        | HP | CFM (FAD)**<br>175 PSI | MAX<br>PSI | TANK<br>SIZE | PUMP    |          |       |     | AIR<br>OUTLET | WEIGHT<br>LBS. | DIMENSIONS (INCHES) |       |        |
|--------------|----|------------------------|------------|--------------|---------|----------|-------|-----|---------------|----------------|---------------------|-------|--------|
|              |    |                        |            |              | MODEL   | CYLINDER | STAGE | RPM |               |                | LENGTH              | WIDTH | HEIGHT |
| TUK-1100GE   | 11 | 19.0                   | 175        | N/A          | TUK-50  | V-3      | 2     | 960 | 1/2"          | 390            | 35                  | 19    | 26.5   |
| TUK-1300GE   | 13 | 27.5                   | 175        | N/A          | TUK-100 | V-3      | 2     | 630 | 3/4"          | 470            | 49                  | 26    | 30     |
| TUK-2000GEC* | 20 | 35.3                   | 175        | N/A          | TUK-100 | V-3      | 2     | 845 | 3/4"          | 500            | 51                  | 30    | 44.5   |

Specifications and data subject to change.

\*Notes: TUK-2030GEC and TUK-2000GEC already equipped with centrifugal clutch.

\*\*Notes: CFM (FAD) = CFM Free Air Delivery

# OMEGA COMPRESSORS

# Heavy Duty Industrial Air Compressors



NCSE-75-50 CLOSED



NCSE-75-50 OPEN



AR-V240R\*

## HEAVY DUTY - SILENT SERIES

- Compressor enclosed soundproof cabinet for quiet operation.
- Constant air movement by cooling fan(s) over pump and to dissipate heat from cabinet.
- Each outfit is CSA approved.
- Each outfit equipped with control panel mounted and wired.
- Each outfit equipped with hour meter and low oil shutdown. (Low oil shutdown not available on NCSE-20 and NCSE-30 series)
- Heavy duty single stage cast iron high efficient compressor pumps on all models from NCSE-20 to NCSE-50 series.
- Heavy duty two stage cast iron high efficient compressor pumps on all models from NCSE-60 to NCSE-150 series.
- Durable cast iron pumps for performance and durability.
- Splash type lubrication.
- All pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All models from NCSE-20 to NCSE-50 factory set at 70 - 90psi.
- All models from NCSE-60 to NCSE-150 factory set at 120 - 150psi.
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.  
(1/2-3HP 115V/1PH) (1/2-10HP 230V/1PH)  
(5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For all automotive, industrial applications including climate control, laboratories and dental clinics.

## Specifications

| MODEL       | HP  | MOTOR RPM | CFM (FAD)**<br>90 PSI | MAX PSI | NOISE LEVEL (dba) | MODEL | PUMP CYLINDER | STAGE | RPM | AIR OUTLET | WEIGHT LBS. | DIMENSIONS (INCHES) |    |    | RECOMMENDED* AIR RECEIVER |
|-------------|-----|-----------|-----------------------|---------|-------------------|-------|---------------|-------|-----|------------|-------------|---------------------|----|----|---------------------------|
| NCSE-20-05  | 1/2 | 1725      | 2.4                   | 125     | 62                | PK-50 | V-2           | 1     | 509 | 1/2"       | 250         | 24                  | 24 | 40 | AR-V30R-PF                |
| NCSE-20-075 | 3/4 | 1725      | 3.4                   | 125     | 65                | PK-50 | V-2           | 1     | 694 | 1/2"       | 255         | 24                  | 24 | 40 | AR-V30R-PF                |
| NCSE-30-01  | 1   | 1725      | 4.1                   | 125     | 62                | PK-60 | V-2           | 1     | 525 | 1/2"       | 270         | 24                  | 24 | 40 | AR-V30R-PF                |
| NCSE-50-015 | 1.5 | 1770      | 6.7                   | 125     | 62                | CK-40 | V-3           | 1     | 420 | 1/2"       | 350         | 24                  | 24 | 40 | AR-V60R-PF                |
| NCSE-50-02  | 2   | 1770      | 9.2                   | 125     | 65                | CK-40 | V-3           | 1     | 544 | 1/2"       | 350         | 24                  | 24 | 40 | AR-V60R-PF                |

| MODEL       | HP  | MOTOR RPM | CFM (FAD)**<br>150 PSI | MAX PSI | NOISE LEVEL (dba) | MODEL  | PUMP CYLINDER | STAGE | RPM | AIR OUTLET | WEIGHT LBS. | DIMENSIONS (INCHES) |    |    | RECOMMENDED* AIR RECEIVER |
|-------------|-----|-----------|------------------------|---------|-------------------|--------|---------------|-------|-----|------------|-------------|---------------------|----|----|---------------------------|
| NCSE-60-03  | 3   | 1725      | 13.0                   | 175     | 65                | CT-50  | V-2           | 2     | 686 | 3/4"       | 480         | 30                  | 29 | 43 | AR-V60R-PF                |
| NCSE-75-50  | 5   | 1725      | 19.0                   | 175     | 68                | TK-50  | V-3           | 2     | 960 | 3/4"       | 550         | 30                  | 29 | 43 | AR-V80R-PF                |
| NCSE-100-75 | 7.5 | 1725      | 27.5                   | 175     | 68                | TK-100 | V-3           | 2     | 630 | 1"         | 800         | 36                  | 31 | 51 | AR-V80R-PF                |
| NCSE-100-10 | 10  | 1770      | 35.3                   | 175     | 70                | TK-100 | V-3           | 2     | 845 | 1"         | 835         | 36                  | 31 | 51 | AR-V120R-PF               |
| NCSE-150-15 | 15  | 1770      | 52.0                   | 175     | 70                | TK-150 | V-3           | 2     | 730 | 1-1/4"     | 1100        | 45                  | 35 | 61 | AR-V120R-PF               |

Specifications and data subject to change.  
 \*Not included. Must be purchased separately.  
 \*\*Notes: CFM (FAD) = CFM Free Air Delivery

**OMEGA**  
**COMPRESSORS**



## Compressed Air Accessories

Aluminum Air Piping

Ball Valves

Check Valves

Compressed Air Filters

Compressor Oil

Compressor Pumps

Desiccant Air Dryers

Electric Motors

Electronic Auto Drains

Filter Elements

Filter - Regulators - Lubricators

Flex Hose Connectors

Gauges

Magnetic Starters

Oil Monitors

Oil/Water Separators

Pilot Valves

Pneumatic Auto Drains

Pressure Switches

Refrigerated Air Dryers

Remote Air Receivers

Safety Valves

Service Parts

Throttle Controls

Vibration Isolators

Water Separators

2 year limited warranty

**OMEGA**  
**COMPRESSORS**

Distributed by:

37 Hamilton Rd.  
Barrie, ON Canada L4N 8Y6  
Tel: 800-668-8448 or (705) 721-9500  
Fax: (705) 721-8646  
Email: [info@omegacompressors.com](mailto:info@omegacompressors.com)  
[www.omegacompressors.com](http://www.omegacompressors.com)